

# OS1

## Mid-Range High-Resolution Imaging Lidar

FIRMWARE VERSION: 3.0.x and 3.1.x

HARDWARE VERSION: REV7.1


### SUMMARY

The mid-range OS1 lidar sensor features 90 m range on a dark 10% target, a 42.4° vertical field of view, and high reliability for the most rugged conditions. The OS1 is designed for all-weather environments and use in industrial automation, autonomous vehicles, mapping, smart infrastructure, and robotics.

REV7.1 is a rolling change to REV7.0 with improvements to sensor reliability.

### HIGHLIGHTS

- Configurable Minimum Range and Return Ordering
- Low Data Rate Profile now available with Dual Returns
- Camera-grade near-infrared and signal data
- Multi-sensor crosstalk suppression
- Ouster Studio for point cloud evaluation
- Ouster SDK, ROS, and C++ drivers for SW development

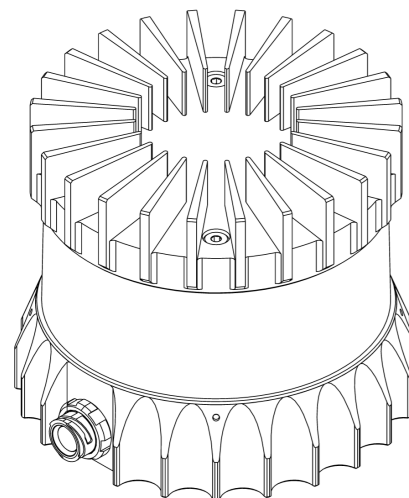

### OPTICAL PERFORMANCE

|                                                              |                                                                                       |
|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Range<br>(80% Lambertian reflectivity,<br>1024 @ 10 Hz mode) | 170 m @ >90% detection probability, 100 klx sunlight                                  |
| Range<br>(10% Lambertian reflectivity,<br>1024 @ 10 Hz mode) | 90 m @ >90% detection probability, 100 klx sunlight                                   |
| Minimum Range                                                | 0.0 m (0.3 m optional, and 0.5 m default); 0.5 m for FW 3.0.x                         |
| Vertical Resolution                                          | 32, 64, or 128 channels                                                               |
| Horizontal Resolution                                        | 512, 1024, or 2048 (configurable)                                                     |
| Rotation Rate                                                | 10 or 20 Hz (configurable)                                                            |
| Field of View                                                | Vertical: 42.4° ± 1.0° (+21.2° to -21.2°)<br>Horizontal: 360°                         |
| Angular Sampling Accuracy                                    | Vertical: ±0.01° / Horizontal: ±0.01°                                                 |
| False Positive Rate                                          | 1/10,000                                                                              |
| Range Resolution                                             | 0.1 cm<br><b>Note:</b> For <i>Low Data Rate Profile</i> the Range Resolution = 0.8 cm |
| # of Returns                                                 | up to 2                                                                               |
| Return Order                                                 | Strongest to Weakest, Farthest to Nearest, and Nearest to Farthest                    |

| <p>Range Precision<br/>(Typical on Lambertian and Retroreflective targets beyond 1 m, 1024 @ 10 Hz mode, 1 standard deviation)</p> <p><b>Note:</b> Precision is calculated based on the standard deviation of 100 measurements on a static target at a given range</p> | <p>Min: ±0.5 cm, Max: ±3 cm</p> <table border="1"><caption>Standard deviation (cm) vs Target distance (m)</caption><thead><tr><th>Target distance (m)</th><th>10% (dotted)</th><th>90% (dashed)</th><th>Retro (solid)</th></tr></thead><tbody><tr><td>0</td><td>0.5</td><td>0.5</td><td>2.0</td></tr><tr><td>10</td><td>0.6</td><td>0.5</td><td>2.0</td></tr><tr><td>20</td><td>0.7</td><td>0.5</td><td>2.0</td></tr><tr><td>30</td><td>0.8</td><td>0.5</td><td>2.0</td></tr><tr><td>40</td><td>1.0</td><td>0.5</td><td>2.0</td></tr><tr><td>50</td><td>1.3</td><td>0.6</td><td>2.0</td></tr><tr><td>60</td><td>1.7</td><td>0.7</td><td>2.0</td></tr><tr><td>70</td><td>2.1</td><td>0.7</td><td>2.0</td></tr><tr><td>80</td><td>2.6</td><td>0.8</td><td>2.0</td></tr><tr><td>90</td><td>3.0</td><td>0.8</td><td>2.0</td></tr></tbody></table> | Target distance (m)    | 10% (dotted)                                   | 90% (dashed)           | Retro (solid) | 0   | 0.5 | 0.5 | 2.0 | 10  | 0.6 | 0.5 | 2.0 | 20 | 0.7 | 0.5 | 2.0 | 30  | 0.8 | 0.5 | 2.0 | 40  | 1.0 | 0.5 | 2.0 | 50 | 1.3 | 0.6 | 2.0 | 60  | 1.7 | 0.7 | 2.0 | 70  | 2.1 | 0.7 | 2.0 | 80 | 2.6 | 0.8 | 2.0 | 90 | 3.0 | 0.8 | 2.0 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------|------------------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|-----|-----|-----|
| Target distance (m)                                                                                                                                                                                                                                                    | 10% (dotted)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 90% (dashed)           | Retro (solid)                                  |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 0                                                                                                                                                                                                                                                                      | 0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 10                                                                                                                                                                                                                                                                     | 0.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 20                                                                                                                                                                                                                                                                     | 0.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 30                                                                                                                                                                                                                                                                     | 0.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 40                                                                                                                                                                                                                                                                     | 1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.5                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 50                                                                                                                                                                                                                                                                     | 1.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.6                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 60                                                                                                                                                                                                                                                                     | 1.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.7                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 70                                                                                                                                                                                                                                                                     | 2.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.7                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 80                                                                                                                                                                                                                                                                     | 2.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.8                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 90                                                                                                                                                                                                                                                                     | 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.8                    | 2.0                                            |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| <p>Range Accuracy<br/>(Typical on Lambertian and Retroreflective targets beyond 1 m, 1024 @ 10 Hz mode)</p> <p><b>Note:</b> Accuracy is calculated based on the error between the mean of 100 measurements on a static target at a given range and the true range</p>  | <p>±2.5 cm for lambertian targets, ±5 cm for retroreflective targets</p> <table border="1"><caption>Mean Range Error (cm) vs Target distance (m)</caption><thead><tr><th>Target distance (m)</th><th>Lambertian (0.1 to 100% reflectivity) (dotted)</th><th>Retroreflector (solid)</th></tr></thead><tbody><tr><td>0</td><td>2.5</td><td>5.0</td></tr><tr><td>10</td><td>2.5</td><td>5.0</td></tr><tr><td>20</td><td>2.5</td><td>5.0</td></tr><tr><td>30</td><td>2.5</td><td>5.0</td></tr><tr><td>40</td><td>2.5</td><td>5.0</td></tr><tr><td>50</td><td>2.5</td><td>5.0</td></tr><tr><td>60</td><td>2.5</td><td>5.0</td></tr><tr><td>70</td><td>2.5</td><td>5.0</td></tr><tr><td>80</td><td>2.5</td><td>5.0</td></tr><tr><td>90</td><td>2.5</td><td>5.0</td></tr></tbody></table>                                                            | Target distance (m)    | Lambertian (0.1 to 100% reflectivity) (dotted) | Retroreflector (solid) | 0             | 2.5 | 5.0 | 10  | 2.5 | 5.0 | 20  | 2.5 | 5.0 | 30 | 2.5 | 5.0 | 40  | 2.5 | 5.0 | 50  | 2.5 | 5.0 | 60  | 2.5 | 5.0 | 70 | 2.5 | 5.0 | 80  | 2.5 | 5.0 | 90  | 2.5 | 5.0 |     |     |     |    |     |     |     |    |     |     |     |
| Target distance (m)                                                                                                                                                                                                                                                    | Lambertian (0.1 to 100% reflectivity) (dotted)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Retroreflector (solid) |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 0                                                                                                                                                                                                                                                                      | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 10                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 20                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 30                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 40                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 50                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 60                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 70                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 80                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |
| 90                                                                                                                                                                                                                                                                     | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.0                    |                                                |                        |               |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |     |     |

LASER

|                              |                                           |
|------------------------------|-------------------------------------------|
| Laser Product Class          | Class 1 eye-safe per IEC/EN 60825-1: 2014 |
| Laser Wavelength             | 865 nm                                    |
| Beam Diameter Exiting Sensor | 9.5 mm                                    |
| Beam Divergence              | 0.18° (FWHM)                              |

LIDAR OUTPUT

|                                                                                          |                                                                                                   |
|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Connection                                                                               | UDP over gigabit Ethernet                                                                         |
| Points Per Second                                                                        | 1,310,720 (32 channel)<br>2,621,440 (64 channel)<br>5,242,880 (128 channel)                       |
| Data Rate (megabits per second)<br>(Low Data Rate Profile, 1 return, 1024 @ 10 Hz mode)  | up to 11.83 Mbps (32 channel)<br>up to 22.32 Mbps (64 channel)<br>up to 43.29 Mbps (128 channel)  |
| Data Rate (megabits per second)<br>(Low Data Rate Profile, 2 returns, 1024 @ 10 Hz mode) | up to 22.32 Mbps (32 channel)<br>up to 43.29 Mbps (64 channel)<br>up to 85.24 Mbps (128 channel)  |
| Data Rate (megabits per second)<br>(Single Return Profile, 1024 @ 10 Hz mode)            | up to 32.81 Mbps (32 channel)<br>up to 64.26 Mbps (64 channel)<br>up to 127.18 Mbps (128 channel) |

|                                                                             |                                                                                                   |
|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Data Rate (megabits per second)<br>(Dual Return Profile, 1024 @ 10 Hz mode) | up to 43.29 Mbps (32 channel)<br>up to 85.24 Mbps (64 channel)<br>up to 169.12 Mbps (128 channel) |
| Data Per Point                                                              | Range, Signal, Reflectivity, Near-infrared, Channel, Azimuth angle, and Timestamp                 |
| Timestamp Resolution                                                        | < 1 $\mu$ s                                                                                       |
| Data Latency                                                                | < 10 ms                                                                                           |
| Data Integrity                                                              | End to End CRC that covers entire data packet                                                     |

#### IMU OUTPUT

|                      |                                                                                                                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection           | UDP over 1000Base-T or 1000Base-T1                                                                                                                                                                 |
| Samples Per Second   | 100                                                                                                                                                                                                |
| Data Per Sample      | 3 axis gyro, 3 axis accelerometer                                                                                                                                                                  |
| Timestamp Resolution | < 1 $\mu$ s                                                                                                                                                                                        |
| Data Latency         | < 10 ms                                                                                                                                                                                            |
| Additional Details   | InvenSense IAM-20680HT; datasheet for more details:<br><a href="https://invensense.tdk.com/download-pdf/iam-20680ht-datasheet/">https://invensense.tdk.com/download-pdf/iam-20680ht-datasheet/</a> |

#### CONTROL INTERFACE

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection                 | HTTP API                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Time Synchronization       | Input sources: <ul style="list-style-type: none"> <li>• IEEE1588 Precision Time Protocol (PTP); Accuracy: &lt;1 ms error</li> <li>• gPTP; Accuracy: &lt;1 ms error</li> <li>• NMEA \$GPRMC UART message support</li> <li>• External PPS; Accuracy: &lt;1 ms error</li> <li>• Internal 10 ppm drift clock; Accuracy: &lt;20 ppm error</li> </ul> Output sources: <ul style="list-style-type: none"> <li>• Configurable 1 - 60 Hz output pulse</li> </ul> |
| Lidar Operating Modes      | <ul style="list-style-type: none"> <li>• x 512 @ 10 Hz or 20 Hz</li> <li>• x 1024 @ 10 Hz or 20 Hz</li> <li>• x 2048 @ 10 Hz</li> </ul>                                                                                                                                                                                                                                                                                                                 |
| Additional Programmability | <ul style="list-style-type: none"> <li>• Multi-sensor phase lock</li> <li>• Queryable intrinsic calibration information:               <ul style="list-style-type: none"> <li>• Beam angles</li> <li>• IMU pose correction matrix</li> </ul> </li> <li>• Return ordering</li> <li>• Minimum range</li> <li>• Azimuth masking</li> <li>• Low-power standby mode</li> </ul>                                                                               |

#### MECHANICAL/ELECTRICAL

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Consumption | 14 - 20 W <ul style="list-style-type: none"> <li>• 16 W nominal</li> <li>• 28 W peak at startup if operating at -40 °C</li> </ul> <b>Note:</b> Ouster recommends use of a power supply of no less than 30 W if using in cold conditions                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Connector         | Standard 1000BASE-T or Automotive Standard 1000BASE-T1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Operating Voltage | 9.5 V - 51 V <ul style="list-style-type: none"> <li>• Suitable for 12 VDC to 24 VDC nominal systems</li> <li>• Not suitable for 48 V nominal battery based systems</li> <li>• Under-voltage WARNING level alert occurs at 9.5 VDC at the connector</li> <li>• Under-voltage ERROR level alert occurs at 9.0 VDC at the connector</li> <li>• Below 9.0 VDC at connector, sensor may shutdown</li> <li>• Over-voltage conditions/alarms occur at 51 VDC at the connector</li> <li>• Over-voltage lockout onset at 58 VDC (<math>\pm 1</math> V) at the connector</li> <li>• Over-voltage lockout release at 55 VDC (<math>\pm 1</math> V) at the connector</li> </ul> |
| Dimensions        | Diameter: 87 mm (3.42 in)<br>Height: <ul style="list-style-type: none"> <li>• Without cap: 58.35 mm (2.3 in)</li> <li>• With thermal cap: 74.2 mm (2.9 in)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

|          |                                                                                                                |
|----------|----------------------------------------------------------------------------------------------------------------|
| Weight   | Without cap: 430 g (15.2 oz)<br>With radial cap: 502 g (17.7 oz)<br>With halo cap: 522 g (18.4 oz)             |
| Mounting | Bottom: 4x M3 screws, 2x locating 2 mm pin holes<br>Top: 4x M3 screws, 4x locating 2 mm pin holes, 1x M6 screw |

#### OPERATIONAL

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Temperature | -40 °C to +60 °C (with mount)<br>Between +53 °C and +60 °C, sensor automatically reduces range (max 20% range reduction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Storage Temperature   | -40 °C to +85 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ingress Protection    | IP68 (1 m submersion for 1 hour, with I/O cable attached)<br>IP69K (with I/O cable attached)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| MTTF                  | >250,000 hours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Shock                 | IEC 60068-2-27 (Amplitude: 100 g, Shape: 11 ms half-sine, 3 shocks x 6 directions)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Vibration             | IEC 60068-2-64 (Amplitude: 5 G-rms, Shape: 10 - 1000 Hz, Mounting: sprung masses, 3 axes w/ 8 hr duration each)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Compliance            | <p><b>Note:</b> Ouster UK (Ltd): 125 Princes Street, Edinburgh EH2 4AD, Scotland, United Kingdom<br/>Contact: Neil Calder, Phone Number: +44(0).131.563.9078</p> <p><b>For US</b><br/>Laser Safety:<br/> <ul style="list-style-type: none"> <li>• IEC 60825-1:2014</li> <li>• FDA US 21CFR1040 Notice 56 Class 1</li> </ul> Product Safety:<br/> <ul style="list-style-type: none"> <li>• UL 62368-1</li> <li>• UL 60950-22 (outdoor use)</li> <li>• CSA-C22.2 No. 62368-1-19</li> <li>• CSA-C22.2 No. 60950-22-07 (outdoor use)</li> </ul> EMC: FCC 47CFR Part 15, Subpart B, Class A</p> <p><b>For EU</b><br/>Laser Safety:<br/>EN 60825-1:2014/A11:2021<br/>Product Safety:<br/>EN/IEC 62368-1<br/>EMC:<br/> <ul style="list-style-type: none"> <li>• EN 55032:2012/AC 2013; CISPR 32:2015</li> <li>• EN 55035:2017/A11:2020</li> <li>• EN 61000-3-2:2014</li> <li>• EN 61000-3-3:2013</li> </ul> </p> <p><b>For Korea</b><br/> <ul style="list-style-type: none"> <li>• KS C 9832:2023</li> <li>• KS C 9835:2019</li> </ul> </p> <p><b>For Australia</b><br/>AS/NZS CISPR 32: 2015</p> <div>    </div> |


#### ACCESSORIES


|               |                                                                                                          |
|---------------|----------------------------------------------------------------------------------------------------------|
| Interface Box | Polycarb/FR4, 100 g, 75 mm x 50 mm x 25 mm (LxWxH), 2 m CAT6 cable, 24 V power adapter, 5 m sensor cable |
| Mount         | Aluminum, 530 g, 110 mm x 110 mm x 20.5 mm (LxWxH), 4 x M8 thru holes                                    |

SOFTWARE


|                |                      |
|----------------|----------------------|
| Sample Drivers | Ouster SDK, ROS, C++ |
| Visualizer     | Ouster Studio        |

EXTERIOR DIMENSIONS



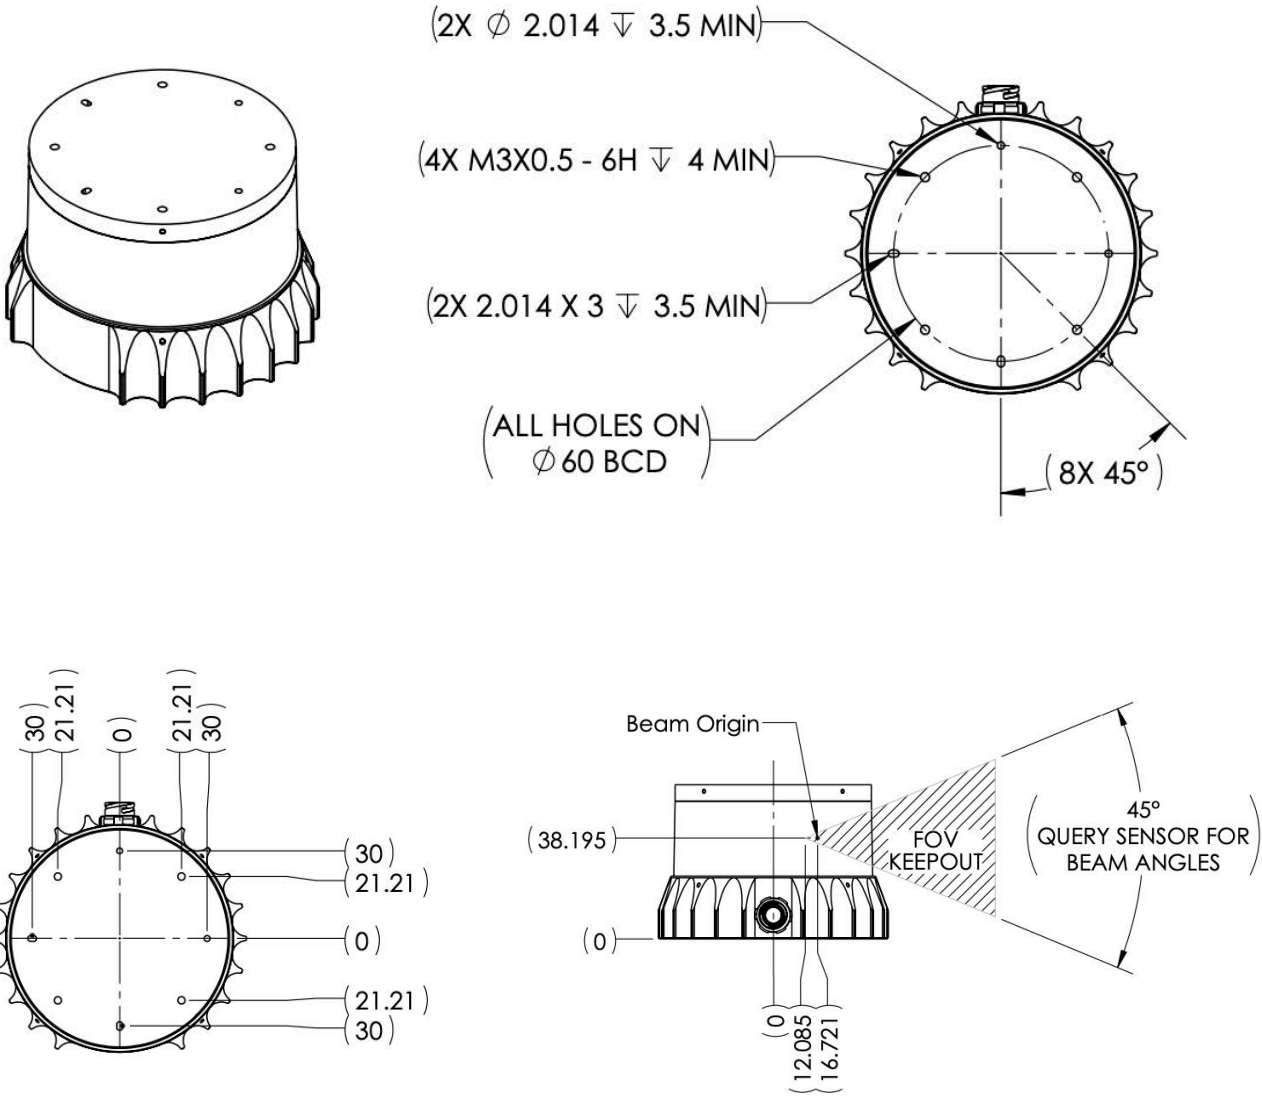


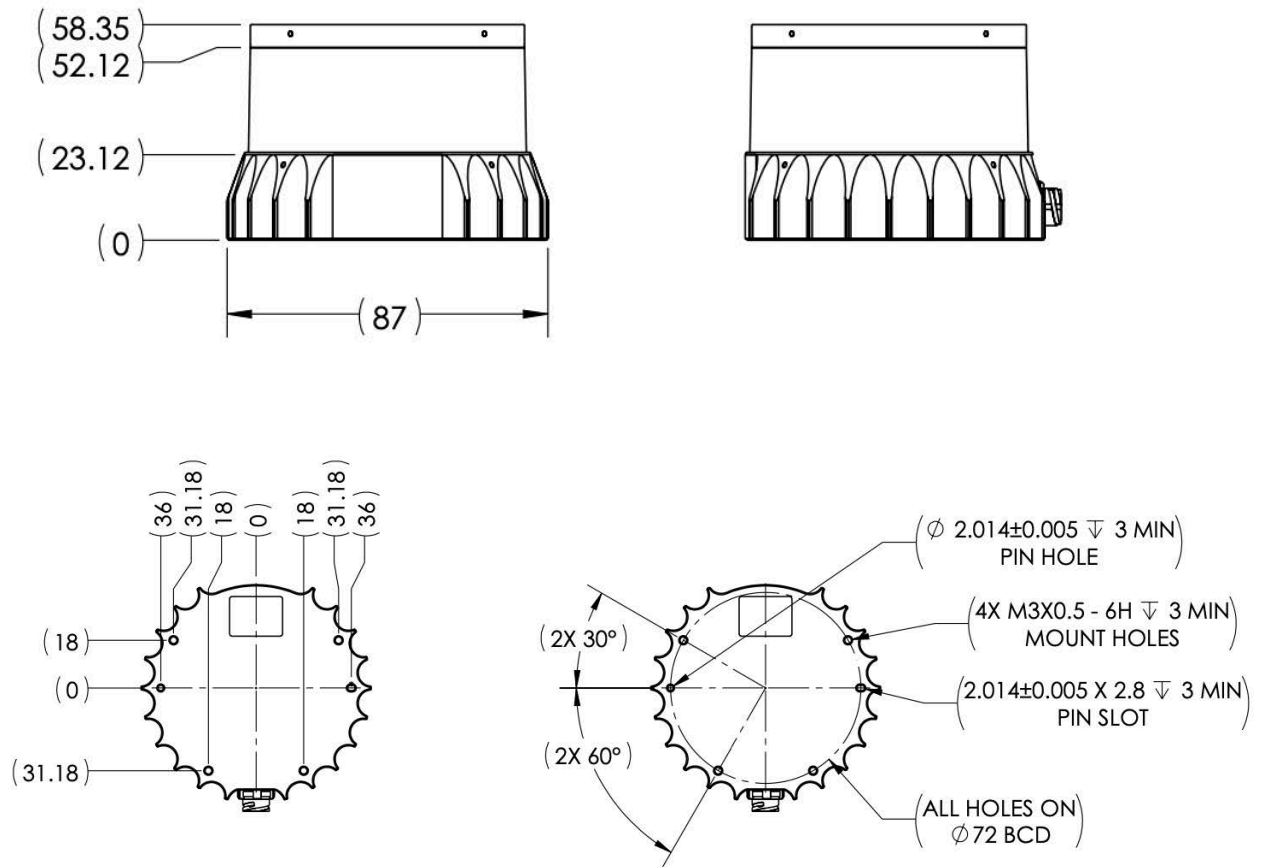


**CABLE PINOUT DIAGRAM FOR TYPE 1, 2 and 3 (1000BASE-T)**

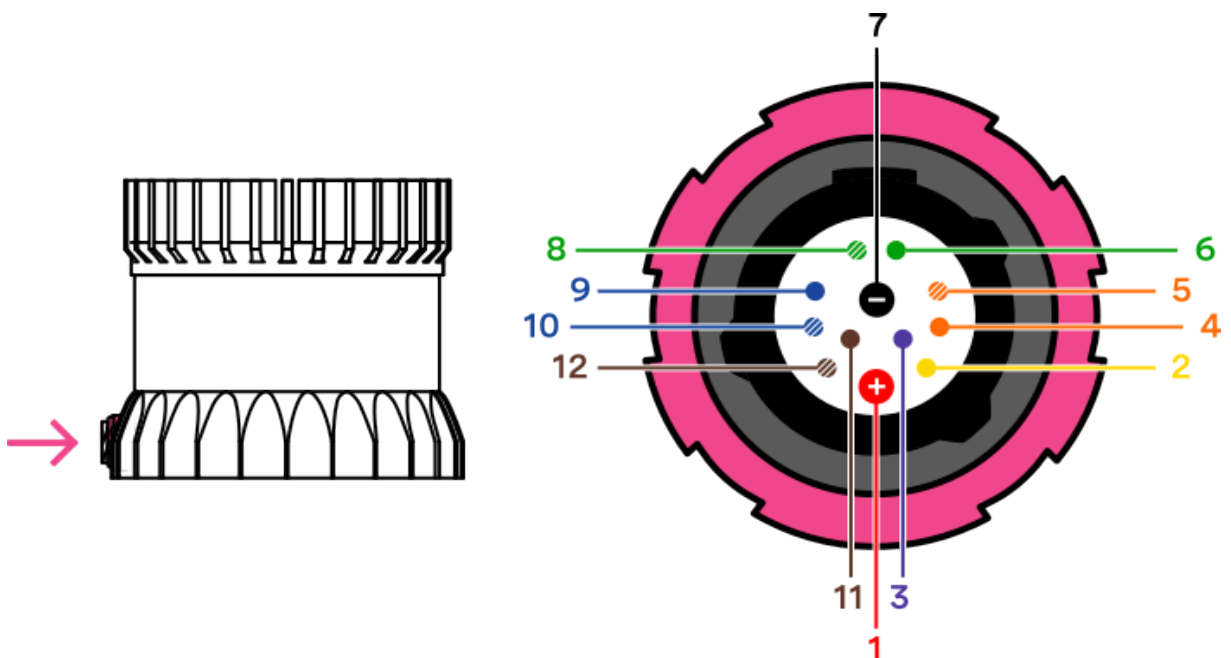

*Pinout and wire gauges for Types 1, 2, and 3 (1000BASE-T) cables*

| Function         | Pin No. | Wire Color    | Type-1, 24V | Type-2, 24V | Type-3, 12V | Twisted with  | Color (Display)                                                                       |
|------------------|---------|---------------|-------------|-------------|-------------|---------------|---------------------------------------------------------------------------------------|
| VCC              | 1       | Red           | 22 AWG      | 22 AWG      | 18 AWG      | N/A           |    |
| GROUND           | 7       | Black         | 22 AWG      | 22 AWG      | 18 AWG      | N/A           |    |
| MULTI-PURPOSE_IO | 3       | Purple        | 26 AWG      | 28 AWG      | 28 AWG      | N/A           |    |
| SYNC_PULSE_IN    | 2       | Yellow        | 26 AWG      | 28 AWG      | 28 AWG      | N/A           |    |
| Ethernet BI_DA+  | 5       | White /Orange | 26 AWG      | 28 AWG      | 28 AWG      | Orange        |    |
| Ethernet BI_DA-  | 4       | Orange        | 26 AWG      | 28 AWG      | 28 AWG      | White /Orange |    |
| Ethernet BI_DB+  | 8       | White /Green  | 26 AWG      | 28 AWG      | 28 AWG      | Green         |  |
| Ethernet BI_DB-  | 6       | Green         | 26 AWG      | 28 AWG      | 28 AWG      | White /Green  |  |
| Ethernet BI_DC+  | 9       | Blue          | 26 AWG      | 28 AWG      | 28 AWG      | White /Blue   |  |
| Ethernet BI_DC-  | 10      | White /Blue   | 26 AWG      | 28 AWG      | 28 AWG      | Blue          |  |
| Ethernet BI_DD+  | 12      | White /Brown  | 26 AWG      | 28 AWG      | 28 AWG      | Brown         |  |
| Ethernet BI_DD-  | 11      | Brown         | 26 AWG      | 28 AWG      | 28 AWG      | White /Brown  |  |

CABLE PINOUT DIAGRAM FOR TYPE 4 (1000BASE-T1)

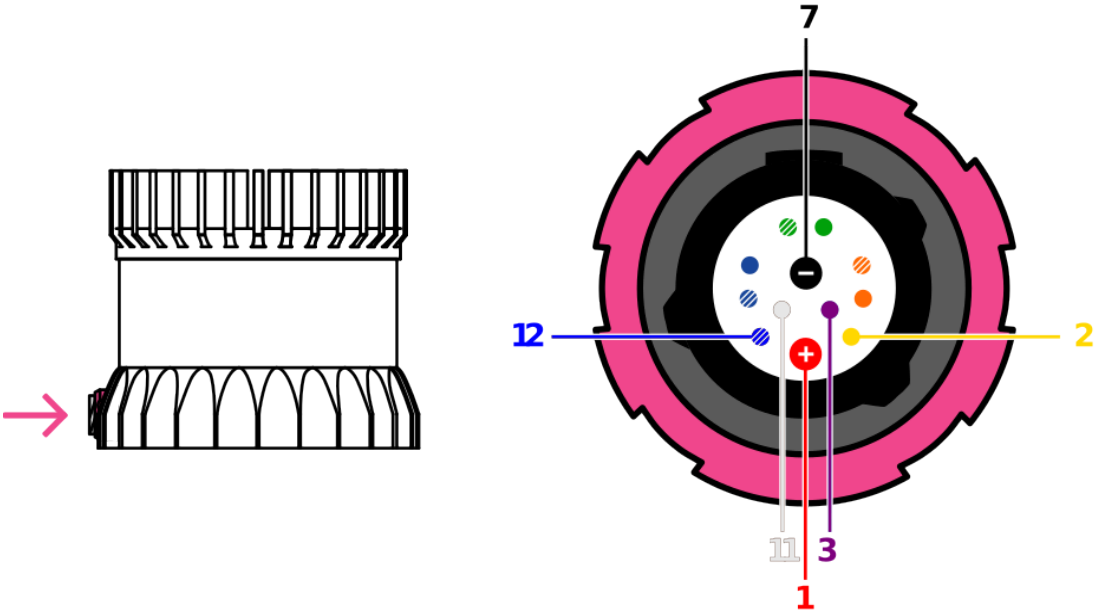

Pinout and wire gauges for Type 4 (1000BASE-T1) cables

| Net Name        | Pin No. | Wire Color | Type-4, Base 1000 T1 | Twisted with | Color (Display)                                                                       |
|-----------------|---------|------------|----------------------|--------------|---------------------------------------------------------------------------------------|
| VCC             | 1       | Red        | 18 AWG               | NA           |  |
| GROUND          | 7       | Black      | 18 AWG               | NA           |  |
| MULTIPURPOSE_IO | 3       | Purple     | 28 AWG               | NA           |  |
| SYNC_PULSE_IN   | 2       | Yellow     | 28 AWG               | NA           |  |
| Ethernet BI_DA+ | 12      | Blue       | 26 AWG               | White        |  |
| Ethernet BI_DA- | 11      | White      | 26 AWG               | Blue         |  |

\*Specifications are subject to change without notice.